Notice for TAIYO YUDEN products

Please read this notice before using the TAIYO YUDEN products.

⚠ REMINDERS

- Product information in this catalog is as of October 2013. All of the contents specified herein are subject to change without notice due to technical improvements, etc. Therefore, please check for the latest information carefully before practical application or usage of the Products.

  Please note that TAIYO YUDEN CO., LTD. shall not be responsible for any defects in products or equipment incorporating such products, which are caused under the conditions other than those specified in this catalog or individual specification.

- Please contact TAIYO YUDEN CO., LTD. for further details of product specifications as the individual specification is available.

- Please conduct validation and verification of products in actual condition of mounting and operating environment before commercial shipment of the equipment.

- All electronic components or functional modules listed in this catalog are developed, designed and intended for use in general electronics equipment.(for AV, office automation, household, office supply, information service, telecommunications, (such as mobile phone or PC) etc.). Before incorporating the components or devices into any equipment in the field such as transportation,(automotive control, train control, ship control), transportation signal, disaster prevention, medical, public information network (telephone exchange, base station) etc. which may have direct influence to harm or injure a human body, please contact TAIYO YUDEN CO., LTD. for more detail in advance.
  Do not incorporate the products into any equipment in fields such as aerospace, aviation, nuclear control, submarine system, military, etc. where higher safety and reliability are especially required.


  In addition, even electronic components or functional modules that are used for the general electronic equipment, if the equipment or the electric circuit require high safety or reliability function or performances, a sufficient reliability evaluation check for safety shall be performed before commercial shipment and moreover, due consideration to install a protective circuit is strongly recommended at customer's design stage.

- The contents of this catalog are applicable to the products which are purchased from our sales offices or distributors (so called "TAIYO YUDEN's official sales channel").
  It is only applicable to the products purchased from any of TAIYO YUDEN's official sales channel.

- Please note that TAIYO YUDEN CO., LTD. shall have no responsibility for any controversies or disputes that may occur in connection with a third party's intellectual property rights and other related rights arising from your usage of products in this catalog. TAIYO YUDEN CO., LTD. grants no license for such rights.

- Caution for export
  Certain items in this catalog may require specific procedures for export according to "Foreign Exchange and Foreign Trade Control Law" of Japan, "U.S. Export Administration Regulations", and other applicable regulations. Should you have any question or inquiry on this matter, please contact our sales staff.

CHIP BEAD INDUCTORS FOR POWER LINES (FB SERIES M TYPE)



WAVE REFLOW

■PARTS NUMBER

*Operating Temp. : −40〜+125℃ (Including self-generated heat)

F	B	△	M	J	3	2	1	6	H	S	8	0	0	—	T	△
①			②	③	④				⑤		⑥			⑦	⑧	⑨

△=Blank space

①Series name

Code	Series name
FB	Ferrite bead

②Shape

Code	Shape
M	Rectangular chip

③Characteristics

Code	Characteristics
J	Standard
H	High Impedance type

④Dimensions (L×W)

Code	Type (inch)	Dimensions (L×W) [mm]
1608	1608 (0603)	1.6×0.8
2125	2125 (0805)	2.0×1.25
2012	2012 (0805)	
2016	2016 (0806)	2.0×1.6
3216	3216 (1206)	3.2×1.6
3225	3225 (1210)	3.2×2.5
4516	4516 (1806)	4.5×1.6
4525	4525 (1810)	4.5×2.5
4532	4532 (1812)	4.5×3.2

⑤Material

Code	Material
HS	Refer to impedance curves for material differences
HM	
HL	

⑥Nominal impedance

Code (example)	Nominal impedance [Ω]
330	33
111	110
132	1300

⑦Impedance tolerance

Code	Impedance tolerance
—	±25%
N	±30%


⑧Packaging

Code	Packaging
T	Taping


⑨Internal code

Code	Internal code
△	Standard

■STANDARD EXTERNAL DIMENSIONS / STANDARD QUANTITY



Recommended Land Patterns
Surface Mounting
・Mounting and soldering conditions should be checked beforehand.



Type	A	B	C
FB MJ1608	1.0	1.0	1.0
FB MJ2125	1.4	1.2	1.65
FB MJ3216	1.4	2.2	2.0
FB MJ4516	1.75	3.5	2.0
FB MH1608	1.0	1.0	1.0
FB MH2012	1.4	1.2	1.65
FB MH2016	1.4	1.2	2.0
FB MH3216	1.4	2.2	2.0
FB MH3225	1.4	2.2	2.9
FB MH4516	1.75	3.5	2.0
FB MH4525	1.75	3.5	2.9
FB MH4532	1.75	3.5	3.7

Unit : mm

Type	L	W	T	e	Standard quantity [pcs]	
					Paper tape	Embossed tape
FB MJ1608 (0603)	1.6±0.2 (0.063±0.008)	0.8±0.2 (0.031±0.008)	0.8±0.2 (0.031±0.008)	0.3±0.2 (0.012±0.008)	4000	—
FB MJ2125 (0805)	2.0±0.2 (0.079±0.008)	1.25±0.2 (0.049±0.008)	0.85±0.2 (0.033±0.008)	0.5±0.3 (0.020±0.012)	4000	—
FB MJ3216 (1206)	3.2±0.3 (0.126±0.012)	1.6±0.2 (0.063±0.008)	1.1±0.2 (0.043±0.008)	0.5±0.3 (0.020±0.012)	—	2000
FB MJ4516 (1806)	4.5±0.3 (0.177±0.012)	1.6±0.2 (0.063±0.008)	1.1±0.2 (0.043±0.008)	0.5±0.3 (0.020±0.012)	—	2000
FB MH1608 (0603)	1.6±0.1 (0.063±0.004)	0.8±0.1 (0.031±0.004)	0.8±0.1 (0.031±0.004)	0.3±0.15 (0.012±0.006)	4000	—
FB MH2012 (0805)	2.0±0.2 (0.079±0.008)	1.25±0.2 (0.049±0.008)	0.85±0.2 (0.033±0.008)	0.5±0.3 (0.020±0.012)	4000	—
FB MH2016 (0806)	2.0±0.2 (0.079±0.008)	1.6±0.2 (0.063±0.008)	1.6±0.2 (0.063±0.008)	0.5±0.3 (0.020±0.012)	—	2000
FB MH3216 (1206)	3.2±0.3 (0.126±0.012)	1.6±0.2 (0.063±0.008)	1.6±0.2 (0.063±0.008)	0.5±0.3 (0.020±0.012)	—	2000
FB MH3225 (1210)	3.2±0.3 (0.126±0.012)	2.5±0.3 (0.098±0.012)	2.5±0.3 (0.098±0.012)	0.5±0.3 (0.020±0.012)	—	1000
FB MH4516 (1806)	4.5±0.3 (0.177±0.012)	1.6±0.2 (0.063±0.008)	1.6±0.2 (0.063±0.008)	0.5±0.3 (0.020±0.012)	—	2000
FB MH4525 (1810)	4.5±0.4 (0.177±0.016)	2.5±0.3 (0.098±0.012)	2.5±0.3 (0.098±0.012)	0.9±0.6 (0.035±0.024)	—	1000
FB MH4532 (1812)	4.5±0.4 (0.177±0.016)	3.2±0.3 (0.126±0.012)	3.2±0.3 (0.126±0.012)	0.9±0.6 (0.035±0.024)	—	2000

Unit : mm (inch)

▶ This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (http://www.ty-top.com/) .

■PARTS NUMBER

Standard type

●FB MJ1608

Parts number	EHS	Nominal impedance (Ω)	Impedance tolerance	Measuring frequency [MHz]	DC Resistance [Ω] (max.)	Rated current [A] (max.)	Thickness [mm]
FB MJ1608HS280NT	RoHS	28	±30%	100	0.007	4.0	0.8 ±0.2
FB MJ1608HM230NT	RoHS	23	±30%	100	0.007	4.0	0.8 ±0.2

●FB MJ2125

Parts number	EHS	Nominal impedance (Ω)	Impedance tolerance	Measuring frequency [MHz]	DC Resistance [Ω] (max.)	Rated current [A] (max.)	Thickness [mm]
FB MJ2125HS250NT	RoHS	25	±30%	100	0.004	6.0	0.85 ±0.2
FB MJ2125HS420-T	RoHS	42	±25%	100	0.008	4.0	0.85 ±0.2
FB MJ2125HM210NT	RoHS	21	±30%	100	0.004	6.0	0.85 ±0.2
FB MJ2125HM330-T	RoHS	33	±25%	100	0.008	4.0	0.85 ±0.2
FB MJ2125HL8R0NT	RoHS	8	±30%	100	0.008	4.0	0.85 ±0.2

●FB MJ3216

Parts number	EHS	Nominal impedance (Ω)	Impedance tolerance	Measuring frequency [MHz]	DC Resistance [Ω] (max.)	Rated current [A] (max.)	Thickness [mm]
FB MJ3216HS480NT	RoHS	48	±30%	100	0.005	6.0	1.1 ±0.2
FB MJ3216HS800-T	RoHS	80	±25%	100	0.010	4.0	1.1 ±0.2
FB MJ3216HM380NT	RoHS	38	±30%	100	0.005	6.0	1.1 ±0.2
FB MJ3216HM600-T	RoHS	60	±25%	100	0.010	4.0	1.1 ±0.2
FB MJ3216HL160NT	RoHS	16	±30%	100	0.012	4.0	1.1 ±0.2

●FB MJ4516

Parts number	EHS	Nominal impedance (Ω)	Impedance tolerance	Measuring frequency [MHz]	DC Resistance [Ω] (max.)	Rated current [A] (max.)	Thickness [mm]
FB MJ4516HS720NT	RoHS	72	±30%	100	0.007	6.0	1.1 ±0.2
FB MJ4516HS111-T	RoHS	110	±25%	100	0.014	4.0	1.1 ±0.2
FB MJ4516HM560NT	RoHS	56	±30%	100	0.007	6.0	1.1 ±0.2
FB MJ4516HM900-T	RoHS	90	±25%	100	0.014	4.0	1.1 ±0.2
FB MJ4516HL230NT	RoHS	23	±30%	100	0.014	3.5	1.1 ±0.2

High impedance type

●FB MH1608

Parts number	EHS	Nominal impedance (Ω)	Impedance tolerance	Measuring frequency [MHz]	DC Resistance [Ω] (max.)	Rated current [A] (max.)	Thickness [mm]
FB MH1608HM470-T	RoHS	47	±25%	100	0.020	3.5	0.8 ±0.1
FB MH1608HM600-T	RoHS	60	±25%	100	0.025	3.0	0.8 ±0.1
FB MH1608HM101-T	RoHS	100	±25%	100	0.035	2.5	0.8 ±0.1
FB MH1608HM151-T	RoHS	150	±25%	100	0.050	2.1	0.8 ±0.1
FB MH1608HM221-T	RoHS	220	±25%	100	0.070	1.8	0.8 ±0.1
FB MH1608HM331-T	RoHS	330	±25%	100	0.130	1.2	0.8 ±0.1
FB MH1608HM471-T	RoHS	470	±25%	100	0.150	1.0	0.8 ±0.1
FB MH1608HM601-T	RoHS	600	±25%	100	0.170	0.9	0.8 ±0.1
FB MH1608HM102-T	RoHS	1000	±25%	100	0.350	0.6	0.8 ±0.1
FB MH1608HL300-T	RoHS	30	±25%	100	0.028	2.6	0.8 ±0.1
FB MH1608HL600-T	RoHS	60	±25%	100	0.045	2.1	0.8 ±0.1
FB MH1608HL121-T	RoHS	120	±25%	100	0.130	1.2	0.8 ±0.1
FB MH1608HL221-T	RoHS	220	±25%	100	0.170	0.9	0.8 ±0.1
FB MH1608HL331-T	RoHS	330	±25%	100	0.210	0.8	0.8 ±0.1
FB MH1608HL471-T	RoHS	470	±25%	100	0.350	0.6	0.8 ±0.1
FB MH1608HL601-T	RoHS	600	±25%	100	0.450	0.5	0.8 ±0.1

●FB MH2012

Parts number	EHS	Nominal impedance (Ω)	Impedance tolerance	Measuring frequency [MHz]	DC Resistance [Ω] (max.)	Rated current [A] (max.)	Thickness [mm]
FB MH2012HM800-T	RoHS	80	±25%	100	0.025	2.7	0.85 ±0.2
FB MH2012HM121-T	RoHS	120	±25%	100	0.032	2.5	0.85 ±0.2
FB MH2012HM221-T	RoHS	220	±25%	100	0.060	2.0	0.85 ±0.2
FB MH2012HM331-T	RoHS	330	±25%	100	0.080	1.8	0.85 ±0.2

●FB MH2016

Parts number	EHS	Nominal impedance (Ω)	Impedance tolerance	Measuring frequency [MHz]	DC Resistance [Ω] (max.)	Rated current [A] (max.)	Thickness [mm]
FB MH2016HM121NT	RoHS	120	±30%	100	0.015	4.5	1.6 ±0.2
FB MH2016HM251NT	RoHS	250	±30%	100	0.050	2.0	1.6 ±0.2

●FB MH3216

Parts number	EHS	Nominal impedance (Ω)	Impedance tolerance	Measuring frequency [MHz]	DC Resistance [Ω] (max.)	Rated current [A] (max.)	Thickness [mm]
FB MH3216HM221NT	RoHS	220	±30%	100	0.020	4.0	1.6 ±0.2
FB MH3216HM501NT	RoHS	500	±30%	100	0.070	2.0	1.6 ±0.2

●FB MH3225

Parts number	EHS	Nominal impedance (Ω)	Impedance tolerance	Measuring frequency [MHz]	DC Resistance [Ω] (max.)	Rated current [A] (max.)	Thickness [mm]
FB MH3225HM601NT	RoHS	600	±30%	100	0.042	3.0	2.5 ±0.3
FB MH3225HM102NT	RoHS	1000	±30%	100	0.100	2.0	2.5 ±0.3
FB MH3225HM202NT	RoHS	2000	±30%	100	0.130	1.2	2.5 ±0.3

▶This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (http://www.ty-top.com/) .

■PARTS NUMBER

●FB MH4516

Parts number	EHS	Nominal impedance (Ω)	Impedance tolerance	Measuring frequency [MHz]	DC Resistance [Ω] (max.)	Rated current [A] (max.)	Thickness [mm]
FB MH4516HM851NT	RoHS	850	±30%	100	0.100	1.5	1.6 ±0.2

●FB MH4525

Parts number	EHS	Nominal impedance (Ω)	Impedance tolerance	Measuring frequency [MHz]	DC Resistance [Ω] (max.)	Rated current [A] (max.)	Thickness [mm]
FB MH4525HM102NT	RoHS	1000	±30%	100	0.060	3.0	2.5 ±0.3
FB MH4525HM162NT	RoHS	1600	±30%	100	0.130	2.0	2.5 ±0.3

●FB MH4532

Parts number	EHS	Nominal impedance (Ω)	Impedance tolerance	Measuring frequency [MHz]	DC Resistance [Ω] (max.)	Rated current [A] (max.)	Thickness [mm]
FB MH4532HM681-T	RoHS	680	±25%	100	0.028	4.0	3.2 ±0.3
FB MH4532HM132-T	RoHS	1300	±25%	100	0.060	3.0	3.2 ±0.3
FB MH4532HM202-T	RoHS	2000	±25%	100	0.130	1.3	3.2 ±0.3

●High current type


Parts number	EHS	Nominal impedance (Ω)	Impedance tolerance	Measuring frequency [MHz]	DC Resistance [Ω] (max.)	Rated current [A] (max.)	Thickness [mm]
FB MJ1608HS220NTR	RoHS	22	±30%	100	0.004	7.5	0.8 ±0.2
FB MJ1608HS280NTR	RoHS	28	±30%	100	0.006	6.0	0.8 ±0.2
FB MJ1608HM180NTR	RoHS	18	±30%	100	0.004	7.5	0.8 ±0.2
FB MJ1608HM230NTR	RoHS	23	±30%	100	0.006	6.0	0.8 ±0.2

▶ This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (http://www.ty-top.com/) .


ELECTRICAL CHARACTERISTICS

FB MJ1608

FB MJ1608HS280NT




FB MJ1608HM230NT




FB MJ2125


FB MJ2125HS420-T




FB MJ2125HS250NT




FB MJ2125HM330-T



FB MJ2125HM210NT




FB MJ2125HL8R0NT




FB MJ3216


FB MJ3216HS800-T




FB MJ3216HS480NT




FB MJ3216HM600-T



FB MJ3216HM380NT




FB MJ3216HL160NT




FB MJ4516


FB MJ4516HS111-T




FB MJ4516HS720NT




FB MJ4516HM900-T



FB MJ4516HM560NT



FB MJ4516HL230NT




▶ This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (http://www.ty-top.com/) .

ELECTRICAL CHARACTERISTICS


Standard type

FB MH1608


FB MH1608HM470-T




FB MH1608HM600-T




FB MH1608HM101-T




FB MH1608HM151-T




FB MH1608HM221-T




FB MH1608HM331-T




FB MH1608HM471-T




FB MH1608HM601-T




FB MH1608HM102-T




FB MH1608HL300-T




FB MH1608HL600-T




FB MH1608HL121-T




FB MH1608HL221-T




FB MH1608HL331-T



FB MH1608HL471-T




FB MH1608HL601-T




FBMH2012


FB MH2012HM800-T




FB MH2012HM121-T



FB MH2012HM221-T




FB MH2012HM331-T




FB MH2016

FB MH2016HM121NT




FB MH2016HM251NT




FB MH3216

FB MH3216HM221NT



FB MH3216HM501NT





▶ This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (http://www.ty-top.com/) .


ELECTRICAL CHARACTERISTICS

Standard type


FB MH3225









FB MH4516





FB MH4525







FB MH4532










High current type









▶ This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (http://www.ty-top.com/) .

CHIP BEAD INDUCTORS FOR POWER LINES (FB SERIES M TYPE)


■PACKAGING


①Minimum Quantity

Type	Standard Quantity [pcs]	
	Paper Tape	Embossed Tape
1608 (0603)	4000	—
2125 (0805)	4000	—
2012 (0805)	4000	—
2016 (0806)	—	2000
3216 (1206)	—	2000
3225 (1210)	—	1000
4516 (1806)	—	2000
4525 (1810)	—	1000
4532 (1812)	—	2000


②Tape Material


● Card board carrier tape

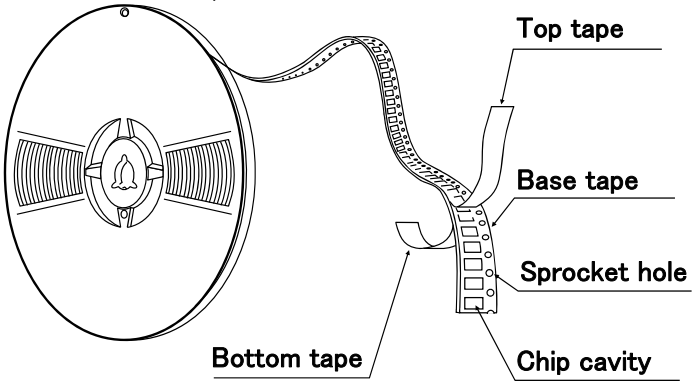




● Embossed tape

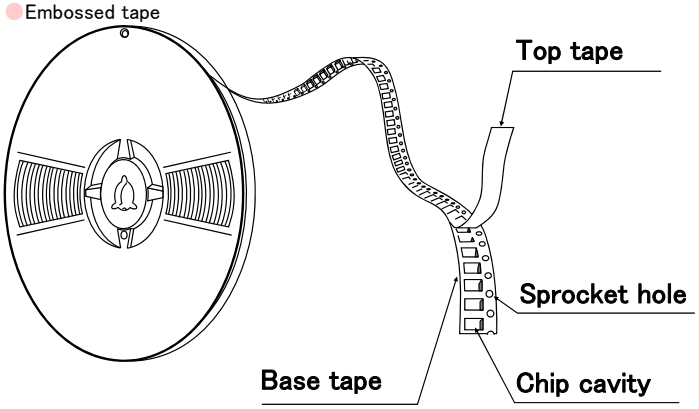



③Taping Dimensions

● Paper tape (0.315 inches wide)

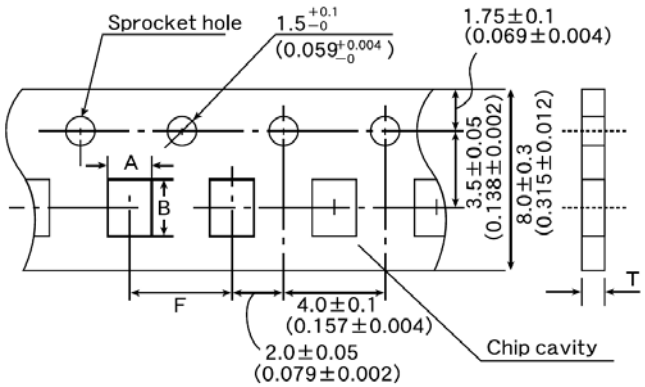


▸ This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification.
For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (http://www.ty-top.com/) .

Type	Chip Cavity		Insertion Pitch	Tape Thickness
	A	B	F	T
FBMJ1608 FBMH1608 (0603)	1.0±0.2 (0.039±0.008)	1.8±0.2 (0.071±0.008)	4.0±0.2 (0.157±0.008)	1.1max (0.043max)
FBMJ2125 FBMH2012 (0805)	1.5±0.2 (0.059±0.008)	2.3±0.2 (0.091±0.008)	4.0±0.2 (0.157±0.008)	1.1max (0.043max)

Unit : mm(inch)


●Embossed tape (0.315 inches wide)

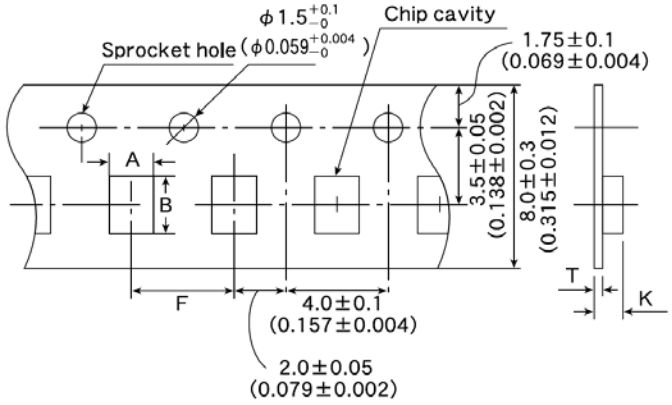

Type	Chip Cavity		Insertion Pitch	Tape Thickness	
	A	B	F	K	T
FBMH2016 (0806)	1.8±0.2 (0.071±0.008)	2.2±0.2 (0.087±0.008)	4.0±0.2 (0.157±0.008)	2.6max (0.102max)	0.6max (0.024max)
FBMJ3216 (1206)	1.9±0.2 (0.075±0.008)	3.5±0.2 (0.138±0.008)	4.0±0.2 (0.157±0.008)	1.5max (0.059max)	0.3max (0.012max)
FBMH3216 (1206)	1.9±0.2 (0.075±0.008)	3.5±0.2 (0.138±0.008)	4.0±0.2 (0.157±0.008)	2.6max (0.102max)	0.6max (0.024max)
FBMH3225 (1210)	2.8±0.2 (0.110±0.008)	3.5±0.2 (0.138±0.008)	4.0±0.2 (0.157±0.008)	4.0max (0.157max)	0.6max (0.024max)

Unit : mm(inch)


●Embossed tape (0.472 inches wide)

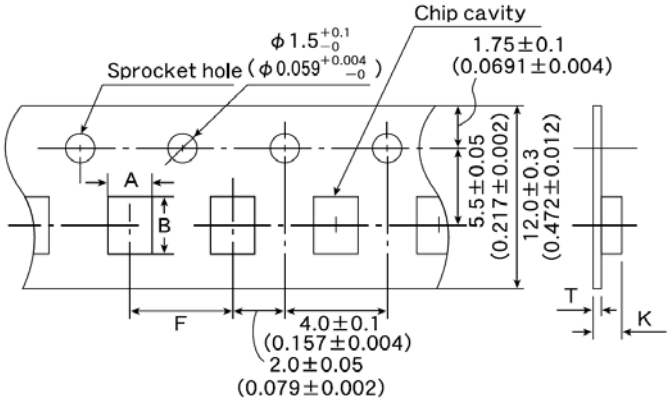

Type	Chip Cavity		Insertion Pitch	Tape Thickness	
	A	B	F	K	T
FBMJ4516 (1806)	1.9±0.2 (0.075±0.008)	4.9±0.2 (0.193±0.008)	4.0±0.2 (0.157±0.008)	1.5max (0.059max)	0.3max (0.012max)
FBMH4516 (1806)	1.9±0.2 (0.075±0.008)	4.9±0.2 (0.193±0.008)	4.0±0.2 (0.157±0.008)	2.6max (0.102max)	0.6max (0.024max)
FBMH4525 (1810)	2.9±0.2 (0.114±0.008)	4.9±0.2 (0.193±0.008)	4.0±0.2 (0.157±0.008)	4.0max (0.157max)	0.6max (0.024max)
FBMH4532 (1812)	3.6±0.2 (0.142±0.008)	4.9±0.2 (0.193±0.008)	8.0±0.2 (0.315±0.008)	4.0max (0.157max)	0.6max (0.024max)


Unit : mm(inch)

④Leader and Blank portion

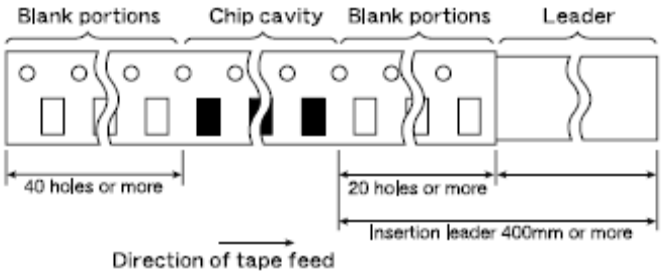

Insertion leader is 400 mm or more (including 20 empty cavities)
Empty cavities at end of reel: 40 holes or more


⑤Reel size

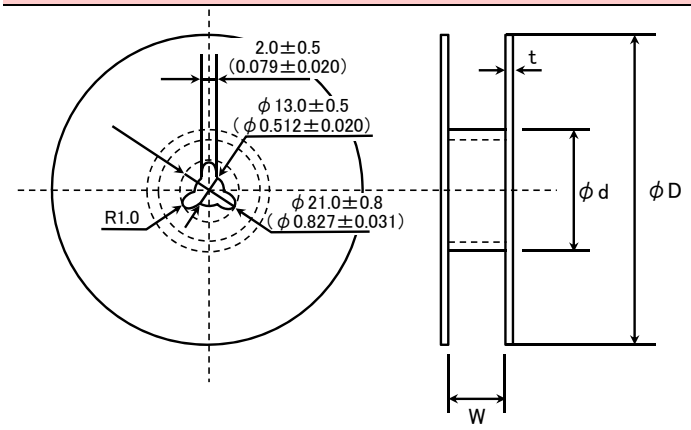

Type	φD	φd	W	t
FBMJ1608	180+0/−3 (7.09+0/−0.118)	60+1/−0 (2.36+0.039/−0)	10.0±1.5 (0.394±0.059)	2.5max (0.098max)
FBMJ2125				
FBMJ3216				
FBMJ4516			14.0±1.5 (0.551±0.059)	
FBMH1608			10.0±1.5 (0.394±0.059)	
FBMH2012				
FBMH2016				
FBMH3216				
FBMH3225				
FBMH4516			14.0±1.5 (0.551±0.059)	
FBMH4525				
FBMH4532	330±2.0 (12.99±0.080)	100±1.0 (3.94±0.039)	14.0±2.0 (0.551±0.080)	3.0max (1.181max)

Unit : mm(inch)

⑥Top tape strength

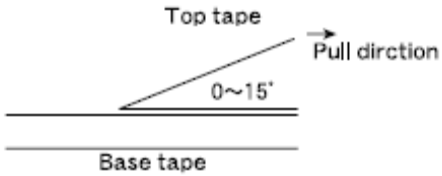

The top tape requires a peel-off force of 0.1 to 0.7N in the direction of the arrow as illustrated below.

CHIP BEAD INDUCTORS FOR POWER LINE (FB SERIES M TYPE)

■RELIABILITY DATA

1. Operating Temperature Range	
Specified Value	−40℃～＋125℃ Including self-generated heat

2. Storage Temperature Range	
Specified Value	−40℃～＋85℃
Test Methods and Remarks	*Note: −5 to ＋40℃ in taped packaging

3. Impedance	
Specified Value	Within the specified tolerance
Test Methods and Remarks	Measuring equipment : Impedance analyzer (HP4291A) or its equivalent Measuring frequency : 100±1 MHz

4. DC Resistance	
Specified Value	Within the specified range
Test Methods and Remarks	Four-terminal method Measuring equipment : Milliohm High-Tester 3226 (Hioki Denki) or its equivalent

5. Rated Current	
Specified Value	Within the specified range

6. Vibration	
Specified Value	Appearance : No significant abnormality Impedance change : Within ±30% of the initial value
Test Methods and Remarks	According to JIS C 0040. Vibration type : A Time : 2 hrs each in X,Y, and Z directions Total: 6 hrs Frequency range : 10 to 55 to 10Hz (/min.) Amplitude : 1.5 mm (shall not exceed acceleration 196m/s^2) Mounting method : Soldering onto PC board

7. Solderability	
Specified Value	90% or more of immersed surface of terminal electrode shall be covered with fresh solder.
Test Methods and Remarks	Solder temperature : 230±5℃ Immersion time : 4±1 sec. Preconditioning : Immersion into flux. Immersion and Removal speed : 25mm/sec.

8. Resistance to Soldering Heat	
Specified Value	Appearance : No significant abnormality Impedance change : Within ±30% of the initial value
Test Methods and Remarks	Preheating : 150℃ for 3 min. Resistance to Soldering Heat : 260±5℃ Duration : 10±0.5 sec. Preconditioning : Immersion into flux. Immersion and Removal speed : 25mm/sec. Recovery : 2 to 3 hrs of recovery under the standard condition after the test.

9. Thermal Shock

Specified Value	Appearance : No significant abnormality Impedance change : Within＋50/－10% of the initial value
Test Methods and Remarks	According to JIS C 0025. Conditions for 1 cycle

Step	Temperature (℃)	Duration (min.)
1	－40±3℃	30±3
2	Room Temperature	Within 3
3	85±2℃	30±3
4	Room Temperature	Within 3

Number of cycles : 100
Mounting method : Soldering onto PC board
Recovery : 2 to 3 hrs of recovery under the standard condition after the removal from test chamber.

10. Resistance to Humidity (steady state)

Specified Value	Appearances : No significant abnormality Impedance change : Within ±30% of the initial value
Test Methods and Remarks	Temperature : 40±2℃ Humidity : 90 to 95% RH Duration : 500＋24/－0 Mounting method : Soldering onto PC board Recovery : 2 to 3 hrs of recovery under the standard condition after the removal from test chamber.

11. Loading under Damp Heat


Specified Value	Appearance : No significant abnormality Impedance change : Within ±30% of the initial value
Test Methods and Remarks	Temperature : 40±2℃ Humidity : 90 to 95%RH Applied current : Rated current Duration : 500＋24/－0 hrs Mounting method : Soldering onto PC board Recovery : 2 to 3hrs of recovery under the standard condition after the removal from test chamber.


12. High Temperature Loading Test

Specified Value	Appearance : No significant abnormality Impedance change : Within ±30% of the initial value
Test Methods and Remarks	Temperature : 85±2℃ Duration : 500＋24/－0 hrs Applied current : Rated current Mounting method : Soldering onto PC board Recovery : 2 to 3 hrs of recovery under the standard condition after the removal from test chamber.

13. Bending Strength

Specified Value	Appearance : No mechanical damage.
Test Methods and Remarks	Warp : 2mm Testing board : Glass epoxy-resin substrate Thickness : 0.8mm



14. Adhesion of Electrode	
Specified Value	No separation or indication of separation of electrode.
Test Methods and Remarks	Applied force : 5N Duration : 10 sec. 

Note on standard condition: "standard condition" referred to herein is defined as follows:
5 to 35℃ of temperature, 45 to 85% relative humidity and 86 to 106kPa of air pressure.
When there are questions concerning measurement results:
In order to provide correlation data, the test shall be conducted under condition of 20±2℃ of temperature, 60 to 70% relative humidity and 86 to 106kPa of air pressure. Unless otherwise specified, all the tests are conducted under the "standard condition."


CHIP BEAD INDUCTORS FOR POWER LINE (FB SERIES M TYPE)

■PRECAUTIONS

1. Circuit Design	
Precautions	◆Operating environment 1. The products described in this specification are intended for use in general electronic equipment, (office supply equipment, telecommunications systems, measuring equipment, and household equipment). They are not intended for use in mission-critical equipment or systems requiring special quality and high reliability (traffic systems, safety equipment, aerospace systems, nuclear control systems and medical equipment including life-support systems,) where product failure might result in loss of life, injury or damage. For such uses, contact TAIYO YUDEN Sales Department in advance. ◆Rated current 1. Rated current of this product is shown in this catalogue, but please be sure to have the base board designed with adequate inspection in case of the generation of heat becomes high within the rated current range when the base board is in high resistance or in bad heating conditions.

2. PCB Design	
Precautions	◆Land pattern design 1. Please refer to a recommended land pattern.

3. Considerations for automatic placement	
Precautions	◆Adjustment of mounting machine 1. Excessive impact load should not be imposed on the products when mounting onto the PC boards. 2. Mounting and soldering conditions should be checked beforehand.
Technical considerations	◆Adjustment of mounting machine 1. When installing products, care should be taken not to apply distortion stress as it may deform the products.

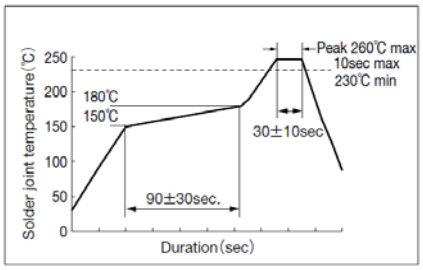4. Soldering	
Precautions	◆Wave soldering 1. Please refer to the specifications in the catalog for a wave soldering. ◆Reflow soldering 1. Please contact any of our offices for a reflow soldering, and refer to the recommended condition specified. ◆Lead free soldering 1. When using products with lead free soldering, we request to use them after confirming adhesion, temperature of resistance to soldering heat, etc. sufficiently. ◆Preheating when soldering Heating : The temperature difference between soldering and remaining heat should not be greater than 150℃. Cooling : The temperature difference between the components and cleaning process should not be greater than 100℃. ◆Recommended conditions for using a soldering iron Put the soldering iron on the land-pattern. Soldering iron's temperature – Below 350℃ Duration – 3 seconds or less The soldering iron should not directly touch the inductor.
Technical considerations	◆Wave, Reflow, Lead free soldering 1. If products are used beyond the range of the recommended conditions, heat stresses may deform the products, and consequently degrade the reliability of the products. 【Recommended reflow condition】  ◆Preheating when soldering 1. There is a case that products get damaged by a heat shock. ◆Recommended conditions for using a soldering iron 1. If products are used beyond the range of the recommended conditions, heat stresses may deform the products, and consequently degrade the reliability of the products.

5. Handling	
Precautions	◆Handling 1. Keep the inductors away from all magnets and magnetic objects. ◆Setting PC boards 1. When setting a chip mounted base board, please make sure that there is no residual stress to the chip by distortion in the board or at screw part. ◆Breakaway PC boards (splitting along perforations) 1. When splitting the PC board after mounting inductors, care should be taken not to give any stresses of deflection or twisting to the board. 2. Board separation should not be done manually, but by using the appropriate devices. ◆Mechanical considerations 1. Please do not give the inductors any excessive mechanical shocks.
Technical considerations	◆Handling 1. There is a case that a characteristic varies with magnetic influence. ◆Setting PC boards 1. There is a case that a characteristic varies with residual stress. ◆Breakaway PC boards (splitting along perforations) 1. Planning pattern configurations and the position of products should be carefully performed to minimize stress. ◆Mechanical considerations 1. There is a case to be damaged by a mechanical shock.

6. Storage conditions	
Precautions	◆Storage 1. To maintain the solderability of terminal electrodes and to keep the packing material in good condition, temperature and humidity in the storage area should be controlled. ・Recommended conditions Ambient temperature 0～40℃ Humidity Below 70% RH The ambient temperature must be kept below 30℃. Even under ideal storage conditions, solderability of products electrodes may decrease as time passes. For this reason, inductors should be used within 6 months from the time of delivery.
Technical considerations	◆Storage 1. Under a high temperature and humidity environment, problems such as reduced solderability caused by oxidation of terminal electrodes and deterioration of taping/packaging materials may take place.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Taiyo Yuden:

FBMH1608HL121-T FBMH1608HL221-T FBMH1608HL300-T FBMH1608HL331-T FBMH1608HL471-T FBMH1608HL600-T FBMH1608HL601-T FBMH1608HM101-T FBMH1608HM102-T FBMH1608HM151-T FBMH1608HM221-T FBMH1608HM331-T FBMH1608HM470-T FBMH1608HM471-T FBMH1608HM600-T FBMH1608HM601-T FBMH2012HM121-T FBMH2012HM221-T FBMH2012HM331-T FBMH2012HM800-T FBMH2016HM251NT FBMH3216HM501NT FBMH3225HM102NT FBMH3225HM202NT FBMH3225HM601NT FBMH4516HM851NT FBMH4525HM102NT FBMH4525HM162NT FBMH4532HM132-T FBMH4532HM202-T FBMH4532HM681-T FBMJ1608HM230NT FBMJ1608HS280NT FBMJ2125HL8R0NT FBMJ2125HM210NT FBMJ2125HM330-T FBMJ2125HS250NT FBMJ2125HS420-T FBMJ3216HL160NT FBMJ3216HM380NT FBMJ3216HM600-T FBMJ3216HS480NT FBMJ3216HS800-T FBMJ4516HL230NT FBMJ4516HM560NT FBMJ4516HM900-T FBMJ4516HS111-T FBMJ4516HS720NT FBMH2016HM121NT FBMJ1608HS280NTR FBMJ1608HS220NTR FBMH3216HM221NT FBMJ1608HM180NTR FBMJ1608HM230NTR FBMH4525HM102NTV FBMJ4516HM900-TV FBMH1608HM101-TV FBMJ2125HM330-TV FBMH1608HL121-TV FBMH1608HM221-TV FBMJ3216HL160NTV FBMJ1608HM230NTV FBMJ3216HS480NTV FBMH3225HM102NTV FBMJ4516HM560NTV FBMJ2125HM210NTV FBMH1608HL331-TV FBMH1608HM151-TV FBMH2016HM121NTV FBMH1608HL300-TV FBMJ4516HS111-TV FBMJ1608HS220NTW FBMH1608HL600-TV FBMH1608HM601-TV FBMH4516HM851NTV FBMH1608HM102-TV FBMH2012HM331-TV FBMJ3216HM380NTV FBMH1608HM471-TV FBMH2016HM251NTV FBMH1608HL471-TV FBMH1608HM600-TV FBMH1608HL221-TV FBMH3225HM202NTV FBMH1608HL601-TV FBMJ3216HM600-TV FBMH3225HM601NTV FBMJ4516HL230NTV FBMJ1608HM230NTW FBMJ3216HS800-TV FBMJ1608HS280NTW FBMH2012HM221-TV FBMJ1608HS280NTV FBMJ4516HS720NTV FBMJ2125HS420-TV FBMH2012HM800-TV FBMJ1608HM180NTW FBMJ2125HS250NTV FBMH1608HM331-TV FBMH2012HM121-TV